

## EZR5002

### 2-ch Digital Input / 4-ch Digital Output Ethernet IO Controller



SUNIX EZR5002 utilizes SUNIX EAZInet networking technology to quickly expand two digital input and four digital output signals via Ethernet, allowing users to conveniently implement automation, swiftly incorporate the Internet of Things into their businesses, and raise their competitiveness.

SUNIX EZR5002 does not require IP setting and supports full network topology, which substantially lightens the burden of network planning and management, shortens the hardware deployment process, and enables subsequent expansions to be executed more flexibly.


SUNIX EZR5002 is capable of automatic device enumeration, which allows the console terminal to quickly search for terminal devices, thus enabling plug-and-play functionality. This greatly improves the convenience of system development for users.

## Features

- 2-ch DI, 4-ch DO, Ethernet-based smart I/O
- Built-in with SUNIX High-Performance Ethernet-IO controller.
- Built-in dual 10/100 Ethernet ports for Ethernet cascading capability.
- IP setting not required, enabling convenient and quick deployment configuration
- Supports daisy chain network topology for flexible and quick I/O expansion
- Automatic device enumeration mechanism facilitates terminal device networking
- Hardware may be wall or rail (DIN) mounted


### IP setting not required, enabling convenient and quick deployment configuration

SUNIX EAZInet networking technology reduces deployment time since it does not communicate via IP addresses. IP address planning and management are not required during hardware installation and deployment, and an I/O expansion simply requires the power supply and networking cables.

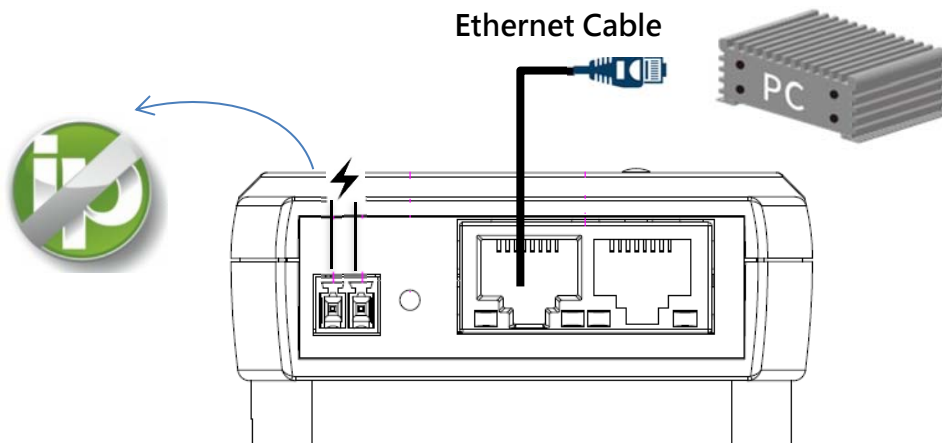

### Supports daisy chaining for flexible I/O expansion

SUNIX DevicePort I/O EZR5002 comes with two 10/100 Ethernet ports, one for connecting to the console device, and the other for connecting (daisy chaining is supported) to a SUNIX DevicePort I/O device. This enables flexible I/O expansions, simplifies network cabling complexity, and reduces wiring cost.

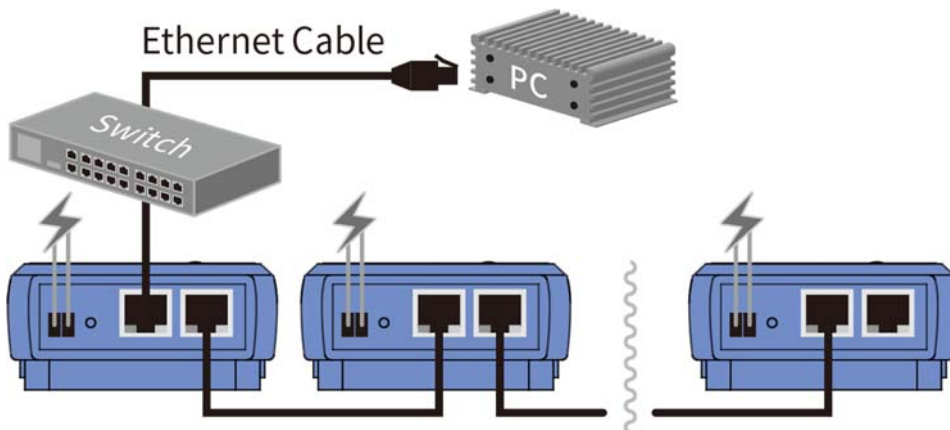

### Automatic device enumeration mechanism facilitates terminal device networking

SUNIX developed the EAZInet network's communication protocol with the aim of facilitating terminal device networking. With this technology, the EZR5002 can be quickly deployed using a network cable and does not need to set IP addresses. After deployment, the SUNIX DevicePort Manager installed in the console computer will promptly search for and detect all EZR5002 devices in the local area network. Once a connection is established, the DevicePort Manager will automatically enumerate each I/O channel based on the models that are used



DIO 1

Selected DevicePort name : EZR5002  
Selected DevicePort MAC : 00:0a:0a:91:00:5a

Bank 1

<input type="checkbox"/>	No	Direction	Invert	Status	Initial Status	Safe Status	Latch Pos
<input checked="" type="checkbox"/>	1	Input	False	Low	Low	Low	False
<input type="checkbox"/>	2	Input	False	Low	Low	Low	False


Bank 2

<input type="checkbox"/>	No	Direction	Invert	Status	Initial Status	Safe Status	Latch Pos
<input checked="" type="checkbox"/>	1	Output	False	Low	Low	Low	False
<input type="checkbox"/>	2	Output	False	Low	Low	Low	False
<input type="checkbox"/>	3	Output	False	Low	Low	Low	False
<input type="checkbox"/>	4	Output	False	Low	Low	Low	False

**Transfer and access mechanisms with active event trigger increase efficiency of data transmission**

Most existing transmission and control mechanisms for terminal devices communicate via polling or other methods. These processing mechanisms suffer from low transmission efficiency, and when a large number of terminal devices are used, the delays of each terminal device are likely to substantially compromise the entire system's control and transmission efficiency.

To address this efficiency problem, SUNIX EZR5002's transfer and access processing mechanisms utilize active event reporting.

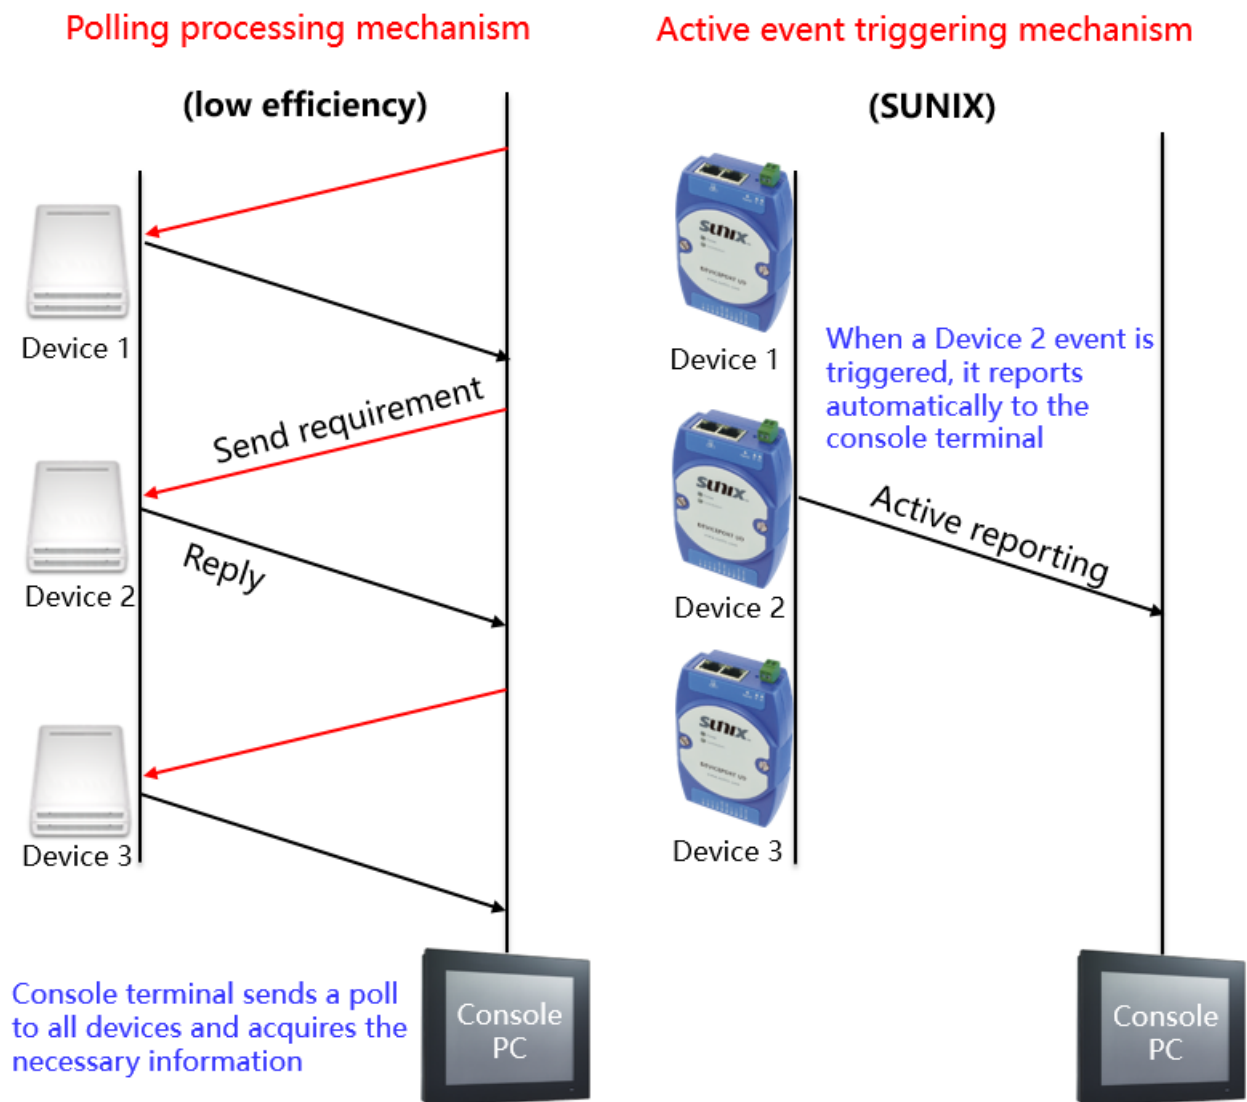

## Common Specifications

---

### LAN

Ethernet: 2-port 10/100 Mbps RJ45 ports

Protection: 1.5 KV magnetic isolation

Protocols: SUNIX EAZInet

### Physical Characteristics

Dimensions: 72.1 x 108 x 33.7 mm

(2.83 x 4.25 x 1.32 in)

Weight: 118 g

Mounting: DIN rail or wall

### Environmental Limits

Operating Temperature:

-25 to 70°C (-13 to 158°F)

Storage Temperature:

-30 to 75°C (-22 to 167°F)

Operation Humidity:

5 to 95% (non-condensing)

### Standards and Certifications

- **EMC:** EN 55032, EN 55035
- **EMI:** CISPR 32, FCC Part 15B Class B
- **EMS:** IEC 61000-4-2
- **ESD:** Contact: 4 kV; Air: 8 kV

## EZR5002 Specifications

---

### Digital Input

Channels: 2 channels

Dry Contact:

- **Logic Level 0:** Open
- **Logic Level 1:** Close to GND

Wet Contact:

- **Logic Level 0:** 3V (Max.)
- **Logic Level 1:** 10 to 50V

Input Resistance: 10 kΩ

Isolation: 1k VDC

Over-Voltage Protection: 70VDC

### Digital Output

Channels: 4 channels

Output Type: NPN

Output Voltage Range: 3.5-30V

Normal Output Current: 500mA per Channel

Isolation: 1k VDC

Startup Value Setting: Yes

Communication Safety Value Setting: Yes

### Power Requirements






Input Voltage: 12 to 24 VDC

Power Consumption: 1.6W @ 24 VDC

Connector: 2 PIN Terminal Block


# Dimensions

72.1x108x33.7mm (2.83 x 4.25 x 1.32 in)

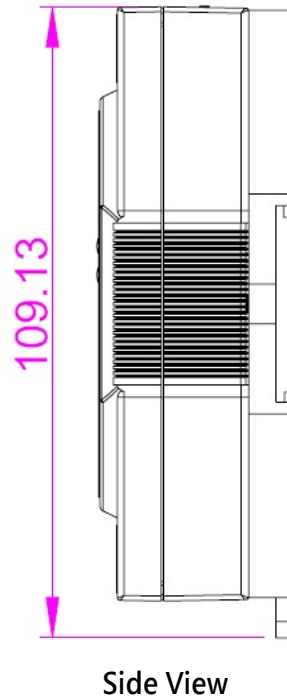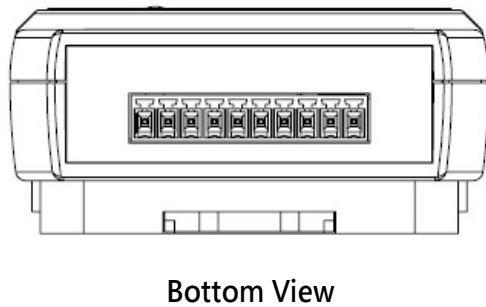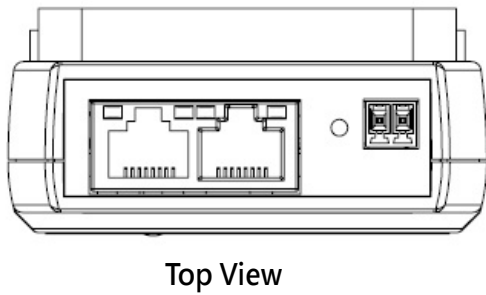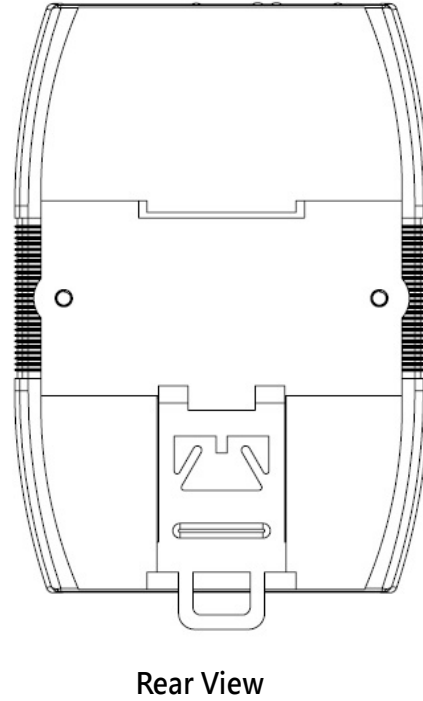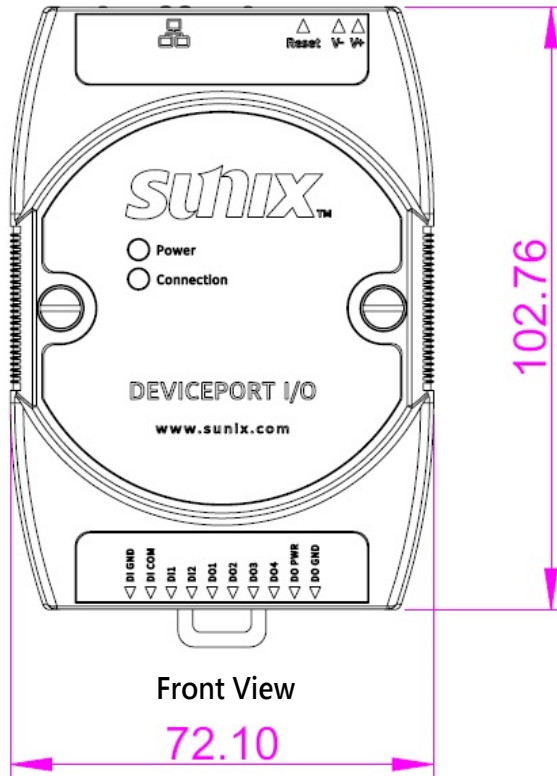

## Pin Assignment

- Digital Input / Digital Output

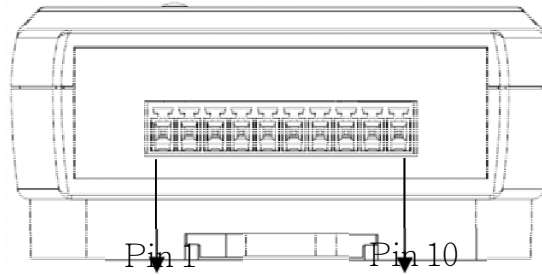

No	1	2	3	4	5	6	7	8	9	10
Pin	DIGND	DI COM	DI1	DI2	DO1	DO2	DO3	DO4	DO PWR	DO GND

## Package Contents

- EZR5002, 2 Channels Digital Input / 4 Channels Digital Output Ethernet IO Controller
- Quick installation guide

## Ordering Information

- EZR5000, 8 Channels Digital Input / 8 Channels Digital Output Ethernet IO Controller
- EZR5001, 4 Channels Digital Input / 2 Channels Digital Output Ethernet IO Controller
- EZR5002, 2 Channels Digital Input / 4 Channels Digital Output Ethernet IO Controller
- EZR5003, 3 Channels Digital Input / 3 Channels Digital Output Ethernet IO Controller
- EZR5230, 8 Channels Analog Input Ethernet IO Controller
- EZR5231, 4 Channels Analog Input Ethernet IO Controller

### Headquarters

#### Taiwan

Sunix Co., Ltd.

Tel : +886-2-8913-1987

Fax : +886-2-8913-1986

Website : [www.sunix.com](http://www.sunix.com)

E-mail : [info@sunix.com](mailto:info@sunix.com)

#### America

SUNIX USA, INC.

Tel : +1 (626) 765-4031

Fax : +1 (909) 594-8906

Website : [www.sunix.com](http://www.sunix.com)

E-mail : [sales.sunixusa@sunix.com](mailto:sales.sunixusa@sunix.com)

#### Germany

Sunix Vertriebs GmbH

Tel : +49(0)6995-20 9506

Fax : +49(0)6995-20 8267

Website : [www.sunix.com](http://www.sunix.com)

E-mail : [info@sunix-euro.de](mailto:info@sunix-euro.de)

#### China

Shanghai Office

Tel : +86-21-6469-1670

Fax : +86-21-6468-8346

Website : [www.sunix.com.cn](http://www.sunix.com.cn)

E-mail : [info@sunix.com.cn](mailto:info@sunix.com.cn)

Beijing Office

Tel : +86-10-65308429

Fax : +86-10-65308421

Shenzhen Office

Tel : +86-07-5533500418