

# PAAG-E3132B

## 2 Ports Triple Monitor 8K DisplayPort 1.4 KVM Switch with USB 3.2 Gen 1, Audio, Hotkey Control

### ► Specifications


| Model Number                  |                     | PAAG-E3132B  |
|-------------------------------|---------------------|--|
| MAX. Resolution               |                     | 7680x4320@60Hz ( 4:4:4 ) ( DSC )<br>7680x4320@30Hz ( 4:4:4 )<br>5120x1440@120Hz ( 4:4:4 )<br>4096x2160@144Hz ( 4:4:4 ) |
| Computer Interface ( 2-Port ) | USB 3.2 Gen 1 Ports | USB-B x 2  |
|                               | Video Input         | DisplayPort 1.4 x 6  |
|                               | Audio Input         | 3.5mm Speaker Jack x 2   |
| Console Interface             | USB 3.2 Gen 1 Ports | USB-A x 1 ( Front )<br>USB-A x 1 ( Rear )  |
|                               | USB HID Ports       | USB-A x 1 ( Front )<br>USB-A x 3 ( Rear )  |
|                               | Video Output        | DisplayPort 1.4 x 3  |
|                               | Audio Output        | 3.5mm Speaker Jack x 1   |
|                               | Control Methods     | Hotkey / Push Button   |
| HDCP Compliance               |                     | HDCP 2.2 and HDCP 1.4  |
| Hot Plug-and-Play             |                     | Yes  |
| Push Buttons                  |                     | Port-Select x 1  |
| LED Indicators                |                     | PC-Ready x 2, PC-Select x 2  |
| Power supply                  |                     | DC 9~12V   |
| Operation Environment         |                     | 0~40°C, Humidity<80%   |
| Storage Temperature           |                     | -20~60°C   |
| H x W x D ( mm )              |                     | 75 x 160 x 100   |
| Material                      |                     | Metal  |
| Weight ( g )                  |                     | 860  |



### ► Overview

The **2 Ports Triple Monitor 8K DisplayPort 1.4 KVM Switch**, PAAG-E3132B, allows 2 computers to share 1 set of KVM console, including DisplayPort 1.4 monitors ( Triple-monitor ), Hotkey Control, 3.5mm speaker, and USB 3.2 Gen 1 devices.

### ► Connection pattern

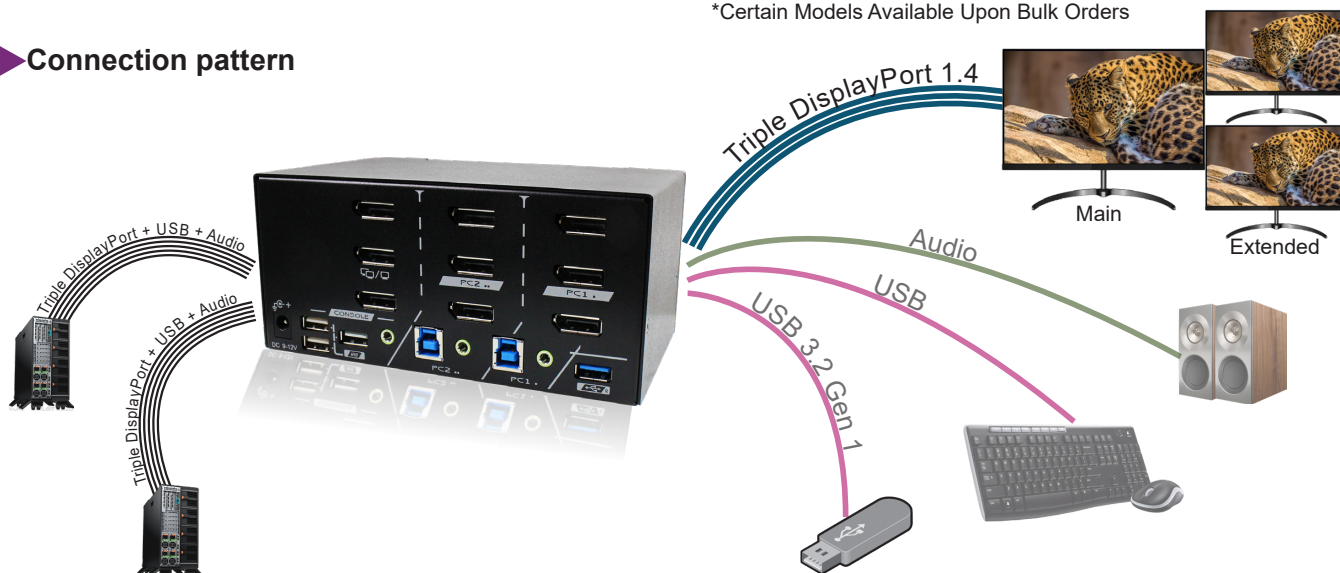

### ► Features

- Allows 2 Computers Share 1 Set of KVM Console
- Triple-Monitor Design Fulfills User's Optimum Work-Efficiency
- DisplayPort 1.4 Video Supports Most Popular Resolutions Up to 4K@144Hz, 5K@120Hz, and 8K@60Hz ( 4:4:4 ) ( DSC )
- HDR10 Support for Best Visual Experience
- HDCP 2.2 and HDCP 1.4 Compliance
- DisplayPort 1.4 Standard Features Compliance :
  - VRR ( Variable Refresh Rate ) for Gaming
  - DSC ( Display Stream Compression ) Allows Even Higher Resolutions
  - HFR ( High-Frame-Rate ) Allows Best Performance in High Dynamic Videos
  - MST ( Multi-Stream Technology ) Allows Expansion to More Monitor Numbers
- 2 Flexible Switching Control Methods :
  - Front Push Buttons
  - Hotkey Control
- Plug-and-Play without Software or Driver
- Front and Rear USB Ports Allow Easy Access
- USB 3.2 Gen 1 Provides Excellent 5Gbps Speed
- Suitable Applications Includes Office, SOHO, Gaming, Industrial Control, and Video Wall Switching

### ► Product Family

| Product Number | Ports | Video Interface        | USB Ports             |
|----------------|-------|------------------------|-----------------------|
| PAAG-GT3112    | 2     | DisplayPort 1.4        | USB 3.2 Gen 2, 10Gbps |
| PAAG-E3112B    | 2     | DisplayPort 1.4        | USB 3.2 Gen 1, 5Gbps  |
| PAAG-E3114B    | 4     |                        |                       |
| PAAG-E3122B    | 2     | Dual DisplayPort 1.4   |                       |
| PAAG-E3132B    |       | Triple DisplayPort 1.4 |                       |
| PAAG-E3142B    |       | Quad DisplayPort 1.4   |                       |
| PAAG-E3124B    | 4     | Dual DisplayPort 1.4   |                       |

\*Certain Models Available Upon Bulk Orders