



M-7003-G

8-ch AI and 4-ch Relay Module

Features

- Voltage and Current Inputs
- Relay Outputs
- High Resolution: 16-bit
- Photocoupler Isolation
- Built-in Dual Watchdog



Introduction

M-7003 is a 16-bit, 8-channel analog input, and 4-channel relay output module. All of its channels are Form A type relay module that provides programmable input range on all analog channels (± 150 mV, ± 500 mV, ± 1 V, ± 5 V, ± 10 V, ± 20 mA, $0 \sim 20$ mA, and $4 \sim 20$ mA). Each analog channel is allowed to configure an individual range and has 120 VDC High Over-voltage Input Protection. Jumper selectable for voltage or current input. The sampling rate of M-7003 is changeable; there are fast mode and normal mode for your consideration. M-7003 also has a qualification for 4 kV ESD protection as well as 2500 VDC intra-module isolation.

Applications


- Building Automation
- Machine Automation
- Remote Diagnosis
- Factory Automation
- Remote Maintenance
- Testing Equipment

Specifications


CPU Module	
Watchdog Timer	Module, Communication (Programmable)
Isolation	
Intra-module Isolation	2500 VDC
EMS Protection	
EFT (IEC 61000-4-4)	± 4 kV for Power Line
ESD (IEC 61000-4-2)	± 4 kV Contact for Each Terminal
Surge (IEC 61000-4-5)	± 3 kV for Power Line
LED Indicators	
Status	1 x Power and Communication
Analog Input	
Channels	8 (5 Differential and 3 Single-ended)
Type	Voltage, Current
Range	± 150 mV, ± 500 mV, ± 1 V, ± 5 V, ± 10 V, ± 20 mA, $0 \sim 20$ mA, $4 \sim 20$ mA (Jumper selectable)
Resolution	16-bit
Accuracy	Normal Mode: 0.1% Fast Mode: 0.5%
Sampling Rate	Normal Mode: 10 Hz Fast Mode: 60 Hz
Input Impedance	Voltage: 20 M Ω (Differential) Current: 10 M Ω (Single-ended)
Common Voltage Protection	± 15 VDC
Overvoltage Protection	120 VDC
Individual Channel Configuration	Yes

Relay Output	
Channels	4
Type	Power Relay (Form A)
Contact Rating	5 A @ 250 VAC 5 A @ 30 VDC
Operate Time	3 ms
Release Time	2 ms
Electrical Endurance	10^5 ops.
Mechanical Endurance	2×10^7 ops.
Power on Value	Programmable
Safe Value	Programmable
COM Ports	
Ports	1 x RS-485
Baud Rate	1200 ~ 115200 bps
Data Format	(N, 8, 1) (N, 8, 2) (E, 8, 1) (O, 8, 1)
Protocol	Modbus RTU, DCON
Power	
Reverse Polarity Protection	Yes
Input Range	+10 ~ +30 VDC
Consumption	1.8 W
Mechanical	
Dimensions (mm)	72 x 123 x 35 (W x L x H)
Installation	DIN-Rail Mounting
Environment	
Operating Temperature	-25 ~ +75 °C
Storage Temperature	-40 ~ +85 °C
Humidity	10 ~ 95% RH, Non-condensing

Internal I/O Structure

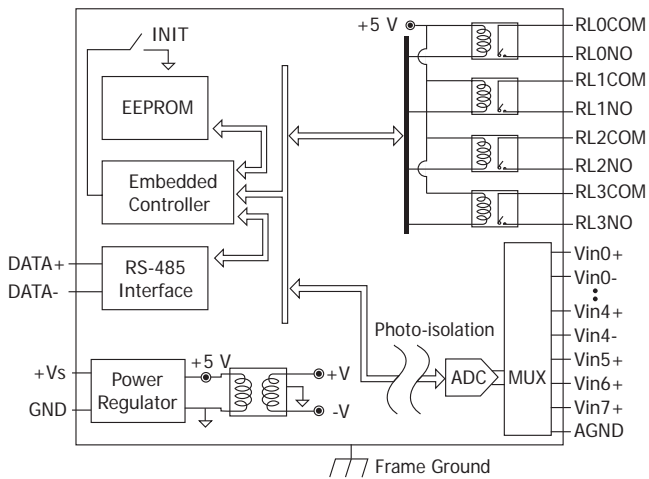

Pin Assignments

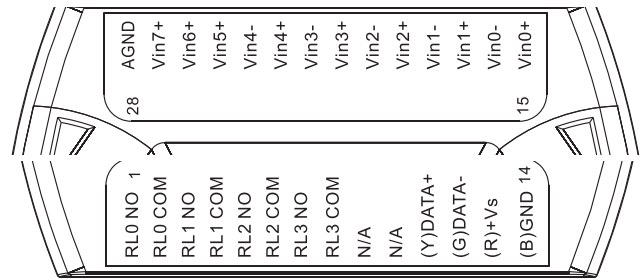







Wire Connections

Voltage Input		Current Input	
Power Relay	ON State Readback as 1	OFF State Readback as 0	
Relay Output			

Ordering Information

M-7003-G CR	8-ch AI and 4-ch Relay Module using DCON and Modbus Protocols (Gray Cover) (RoHS)
--------------------	---

Accessories

tM-7520U CR	 Tiny Isolated RS-232 to RS-485 Converter (RoHS)
tM-7561 CR	 Tiny USB to Isolated RS-485 Converter with CA-USB18 Cable (RoHS)
tM-SG4 CR	 RS-485 Pull-high/Pull-low and Termination Resistor Module (RoHS)
I-7514U CR	 Isolated 4-channel RS-485 Repeater/Hub/Splitter (Gray Cover) (RoHS)
SG-770 CR	 7/14 channel Surge Protector (RoHS)
SG-3000 Series	 Signal Conditioning Modules for Thermocouple, RTD, DC Voltage, DC Current and Power Input Transformers