



Introduction_

WISE (Web Inside, Smart Engine) is a product series developed by ICP DAS that functions as control units for use in remote logic control and monitoring in various industrial applications. WISE offers a user-friendly and intuitive web site interface that allows users to implement IF-THEN-ELSE control logic on controllers just a few clicks away; no programming is required. With its powerful and easy-to-use features, it will minimize the learning curve, shorten time to market and dramatically reduce the labor and cost spent on system development.

WISE-7152 follows IEEE 802.3af-compliant (classification, Class 1) Power over Ethernet (PoE) specification. It allows receiving power from PoE enabled network by Ethernet pairs (Category 5 Ethernet cable). This feature provides greater flexibility and higher efficiency therefore simplifying systems design, saving space, reducing cables and eliminating the requirement for dedicated electrical outlets. Meanwhile, in case under a non-PoE environment, WISE-7152 will still be able to receive power from auxiliary power sources like AC adapters or battery, etc.

This module WISE-7152 supports Modbus/TCP protocol to make seamless integration with SCADA software available. It features 8-channel isolated open collector outputs and 8-channel isolated wet contact digital inputs. Each output channel supports 650 mA currnet driving @ 10 ~ 40 VDC and each digital input channel supports counter input.

Applications _

Building Automation, Factory Automation, Machine Automation, Remote Maintenance, Remote Diagnosis, Testing Equipment, etc.

I/O Specifications _____

| Digital In | put | |
|--------------------------|----------------------|----------------------------|
| Input Channels | | 8 |
| Input Type | | Wet Contact (Sink, Source) |
| On Voltage Level | | +10 Vdc ~ +50 Vdc |
| Off Voltage Level | | +4 V _{DC} Max. |
| Input Impedance | | 10 kΩ |
| | Max. Count | 65535 (16 bits) |
| Counters | Max. Input Frequency | 50 Hz |
| | Min. Pulse Width | 10 ms |
| Overvoltag | e Protection | +70 Vdc |
| Digital Ou | utput | |
| Output Channels | | 8 |
| Output Type | | Open Collector (Source) |
| Max. Load Current | | 650 mA/channel at 25 °C |
| Output Voltage | | +10 Vdc ~ +40 Vdc |
| Overvoltage Protection | | 47 V _{DC} |
| Overload Protection | | - |
| Short-circuit Protection | | Yes |

System Specifications _____

| System | |
|-----------------------------|--|
| CPU | 16-bit CPU |
| SRAM | 512KB |
| Flash Memory | 512КВ |
| EEPROM | 16KB |
| Watchdog | Yes |
| Communication | |
| PoE Ethernet Port | 10/100 Base-TX and automatic MDI/ MDI-X |
| 2-Way Isolation | |
| I/O | 2500 VDC |
| EMS Protection | |
| ESD (IEC 61000-4-2) | ± 4 kV Contact for each terminal and ± 8 kV Air for random point |
| EFT (IEC 61000-4-4) | ±2 kV for Power Line |
| LED Indicators | |
| PoE Power | PoE On |
| L1 | System Running |
| L2 | Ethernet Link/Act |
| L3 | Ethernet 10/100 M Speed |
| Power Requirements | |
| Reverse Polarity Protection | Yes |
| Powered from Terminal Block | Yes, 12 ~ 48 V _{DC} |
| Powered from PoE | Yes, IEEE 802.3af, Class1 |
| Consumption | 4.3 W |
| Mechanical | |
| Dimensions (W x L x D) | 72 mm x 123 mm x 35 mm |
| Installation | DIN-Rail or Wall mounting |
| Environment | |
| Operating Temperature | -25 °C ~ +75 °C |
| Storage Temperature | -30 °C ~ +80 °C |
| Humidity | 10 ~ 90% RH, non-condensing |

Software Specifications

| Functions | | |
|-----------------------------|--|--|
| Rule Configuration Website | Access Web server on WISE controllers to edit and upload logic rules through web browser. | |
| 36 IF-THEN-ELSE Logic Rules | 3 IF conditions with AND or OR operators 3 THEN actions and 3 ELSE actions | |
| 48 Internal Registers | Hold temporary variables and read/write data via Modbus/TCP address. | |
| 12 Timers | Delay / Timing functions. | |
| 12 Emails | Send Email messages to pre-set Email receivers. | |
| 12 CGI Commands | Send pre-set CGI commands. | |
| 12 Recipes | Set up THEN/ELSE action groups. | |
| 8 P2P remote modules | Set up the connection information for the remote WISE modules. | |
| Modbus/TCP Protocol | Real time control and monitoring I/O channels and system status of controllers via SCADA software. | |

| IF Conditions | | |
|-------------------|---------------------------------------|--|
| DI Channel | ON, OFF, ON to OFF, OFF to ON, Change | |
| Internal Register | =, >, <, >=, <= (value) | |
| DI Counter | | |
| DO Counter | =, >, <, >=, <= (value), Change | |
| Timer | Timeout, Not Timeout | |
| P2P | DI, AI, DI counter, DO counter, IR | |
| Rule Status | Enable, Disable | |
| | | |



Dimensions (Unit:mm).

| THEN / ELSE Actions | | |
|---------------------|-----------------------|--|
| DO Channel | ON, OFF, Pulse Output | |
| Internal Register | Change the value | |
| DI Counter | Deast | |
| DO Counter | Reset | |
| Timer | Start, Reset | |
| Email | Send | |
| CGI Commands | Sellu | |
| Recipe | Execute | |
| P2P | DO(On/Off), AO, IR | |
| Rule Status | Enable, Disable | |
| | | |


Pin Assignments.

| Terminal No. | Pin Assignment |
|-----------------|-------------------|
| E1 | RJ-45 |
| 01 | IN3 |
| 02 | IN4 |
| 03 | IN5 |
| 04 | IN6 |
| 05 | IN7 |
| 06 | IN.COM2 |
| 07 | N/A |
| 08 | (R)+Vs |
| 09 | (B)GND |



| Terminal No. | Pin Assignment |
|-----------------|-------------------|
| 23 | IN2 |
| 22 | IN1 |
| 21 | INO |
| 20 | IN.COM1 |
| 19 | DO7 |
| 18 | DO6 |
| 17 | DO5 |
| 16 | DO4 |
| 15 | DO3 |
| 14 | DO2 |
| 13 | DO1 |
| 12 | DO0 |
| 11 | DO.GND |
| 10 | DO.PWR |
| | |

Wire Connections_

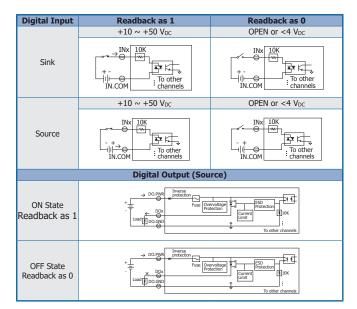

33

Front View

59,2 72

Right Side View

Bottom View

Ordering Information _

| WISE-7152 CR | 8-channel Isolated Source Type Open Collector Output and 8-channel Isolated Digital Input PoE Module (RoHS) | |
|--------------|---|--|
| Accessories | | |
| | | |
| GPSU06U-6 | 24V/0.25A, 6 W Power Supply | |
| MDR-20-24 | 24V/1A, 24 W Power Supply with DIN-Rail Mounting | |
| NS-205 CR | Unmanaged 5-Port Industrial Ethernet Switch (RoHS) | |
| NS-205PSE CR | Unmanaged 5-Port Industrial PoE Ethernet Switch (RoHS) | |

Ethernet I/O Modules