



Shenzhen Jawest Electronic Technology Co., Ltd

Product	23.8-inch Industrial Panel PC – JWS238-W210
Display	
Panel Type	Industrial A grade LCD with LED backlight
Aspect Ratio	16:9
Resolution	1920*1080
Contrast	1000:1
Luminance	300nit, up to 1200 nits
Response time	5ms
Active Area (mm)	528*297.5
Display colors	16.7M(8-bit)
PC Configuration	
CPU	Intel® Celeron® Processor J1900, Quad-Core up to 2.0 GHz, Intel® Smart Cache 2 MB; Intel Celeron J4125, Intel Core i3/i5/i7 can be customized
Graphic Card	Integrated Intel HD Graphics
Inner memory	2GB DDR3L 1333 MHz RAM (4GB/8GB/16GB RAM can be customized)
Storage	32GB SSD (64GB/128GB/256GB/512GB SSD, 500GG/1TB HDD can be customized)
Expansion Card Slot	2xMini-PCIE slot, support SSD, WIFI, 3G module
Audio	Realtek ALG662 6 sound track audio frequency
Internet	1xRTL811E gigabit network card
Operating System	Windows 7/8.1/10, WES7-E/P, WE8S, Ubuntu 14.04
Support multi-language	English/Portuguese/French...etc

Touch Screen	Default with 10-point capacitive touch, support Two-finger Touch Control while Wearing Gloves; Optional Resistive touch / Non-touch
Touch Screen Surface Hardness	7 Mohs
Touch Screen Transparency	90% ($\pm 3\%$)
I/O Ports	1*12V DC_JACK input (ATX is optional) , 1*VGA, 1*HDMI, 4*USB port
	1*RJ-45 network interface, 1*Audio I/O interface, 2*COM (can be customized, up to 6*COM)
Power Input	AC 110-240V, 50/60Hz
Power Connector Type	2-Pin Terminal Block, Phoenix Connector
Power Consumption (Typical)	1.53A @ 12V (18.4W)
Power Consumption (Max)	1.8A @ 12V (21.6W)
Operation Temperature	-10°C-60°C
Storage Temperature	-40°C-85°C
Operation Humidity	5%--80%
Storage Humidity	5%-90%
Material	Aluminum alloy enclosure+ High Strength Cold Rolled Steel
Bezel Thickness	3mm bezel
IP Rating	IP65 True Flat Front Panel
Color	Default with Black Color; Optional Silver Color;
Installation Way	Default with Embedded / Wall Mount bracket; VESA / Desktop optional
Certification	CE,FCC,ROHS,ISO9001
Warranty	3 years warranty (with the exception of man-made damage)
Packaging	EPE+Carton (wooden crate for mass order)
Dimensions (L x W x H)	23.8inch with 606 x 376 x 67 mm ;

Packing List

1 x JWS238-W238;
1 x Power Adapter;
1 x power cable;
4 x Embedded Bracket;

Applications

Human Machine Interface (HMI);
Factory / Manufacturing Automation;
ATM / Self-service / Kiosk Applications;
Vending Machine / Ticketing Machine



Thick foam cover&hold the product



tighten up the outer packaging with plastic straps



English Manual& Warranty Card



Power adaptor




Power plug (CN/EU/UK/US/AU)



Embedded Buckle *4

Embedded installation steps

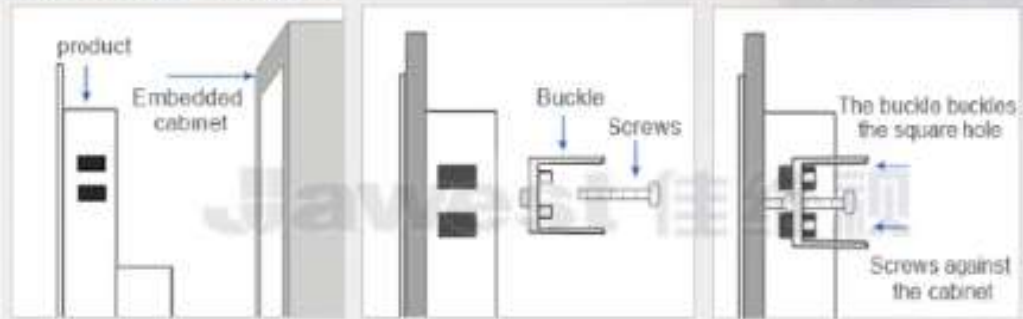

Wall-mounting steps



Embedded installation effect.



Embedded Buckle (standard)



VESA(Extra cost)



Wall mount Kit (Optional)



Desktop kit



Folding Kit (Optional)

